



VoIP Intercom

The CyberData SIP-enabled VoIP Intercom is a Power-over-Ethernet (PoE 802.3af) and Voice-over-IP (VoIP) two-way communications device that easily connects into existing local area networks (LANs) with a single cable connection. The intercom is compatible with most SIP-based IP PBX servers that comply with the SIP RFC. Its tamper-proof design allows the unit to be mounted securely and safely.

Typical Applications

- Access control
- Door entry phone
- Emergency phone
- Mass notification

Features


- PoE 802.3af enabled (Powered-over-Ethernet)
- SIP or multicast support
- Dual-speed Ethernet 10/100 Mbps
- Full-duplex voice operation
- Network web management
- Network adjustable speaker volume
- Network adjustable mic sensitivity
- Network downloadable firmware
- Doubles as a paging speaker
- Tamper-proof design
- Dry relay contact for auxiliary control
- Two-way hands-free communications
- Configurable relay-on time




VoIP Intercom Specifications	
Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant Optional: +5 volts at 1000mA
Payload Types	G711
Regulatory Compliance	FCC Class B, UL 60950, CE, CSA
Dimensions	5" x 5" x 2.5" (H x W x D)
Warranty	3 years limited
Part Number	010935



Typical Installation - Door Entry/Access Control

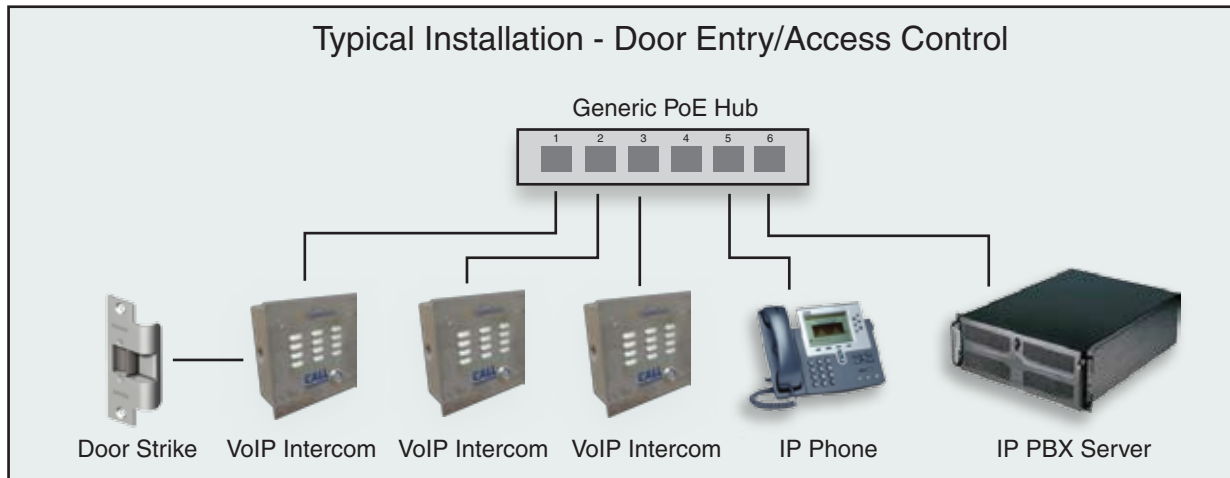

Typical Installation - Mass Notification

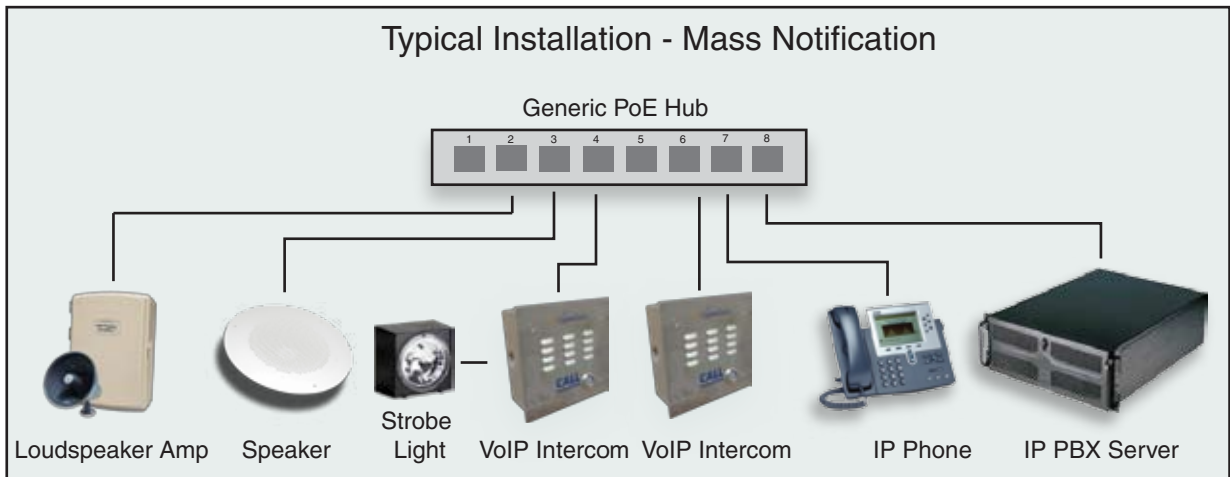

Typical Installation - Emergency Phone

